

NIGHT LUX SOFT A 163X323X1,2

| REFERENCE | SIZE (cm)   | THICKNESS (mm) | GROUP     |
|-----------|-------------|----------------|-----------|
| A041832   | 163X323X1,2 | 12,00          | PC BIA GL |



DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

|                  |                 |                    |
|------------------|-----------------|--------------------|
| Frost resistance | EN ISO 10545-12 | It stands the test |
|------------------|-----------------|--------------------|

CHEMICAL PROPERTIES

## NIGHT LUX SOFT B 163X323X1,2

| REFERENCE      | SIZE (cm)   | THICKNESS (mm) | GROUP     |
|----------------|-------------|----------------|-----------|
| <b>A041842</b> | 163X323X1,2 | 120,00         | PC BIA GL |



### DIMENSIONS AND SURFACE PROPERTIES

### PHYSICAL PROPERTIES

|                  |                 |                    |
|------------------|-----------------|--------------------|
| Frost resistance | EN ISO 10545-12 | It stands the test |
|------------------|-----------------|--------------------|

### CHEMICAL PROPERTIES

NIGHT LUX POL A 163X323X1,2

| REFERENCE | SIZE (cm)   | THICKNESS (mm) | GROUP     |
|-----------|-------------|----------------|-----------|
| A041838   | 163X323X1,2 | 12,00          | PC BIA GL |



DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

|                  |                 |                    |
|------------------|-----------------|--------------------|
| Frost resistance | EN ISO 10545-12 | It stands the test |
|------------------|-----------------|--------------------|

CHEMICAL PROPERTIES

NIGHT LUX POL B 163X323X1,2

| REFERENCE | SIZE (cm)   | THICKNESS (mm) | GROUP     |
|-----------|-------------|----------------|-----------|
| A041846   | 163X323X1,2 | 120,00         | PC BIA GL |




DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

|                  |                 |                    |
|------------------|-----------------|--------------------|
| Frost resistance | EN ISO 10545-12 | It stands the test |
|------------------|-----------------|--------------------|

CHEMICAL PROPERTIES

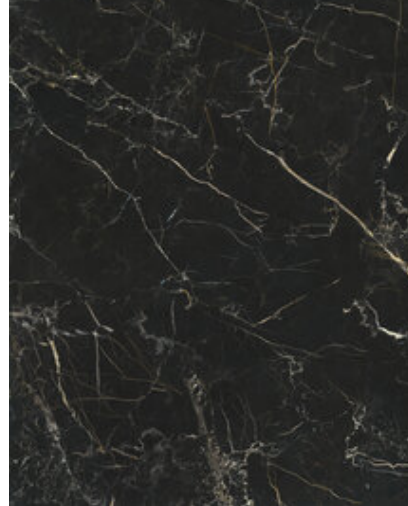

## NIGHT LUX SOFT RECT 120X280

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A040833</b> | 120X280   | 6,00           | PC BIA GL |

### DIMENSIONS AND SURFACE PROPERTIES

|   |              |                                  |
|---|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|---|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                           |                 |                         |
|---------------------------|-----------------|-------------------------|
| Water absorption capacity | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance        | EN ISO 10545-04 | => 40 N/mm <sup>2</sup> |
| Thermal shock resistance  | EN ISO 10545-09 | It stands the test      |
| Frost resistance          | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|  |                 |    |
|--|-----------------|----|
| Resistance to cleaning products                        | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance                                      | EN ISO 10545-14 | 3  |

## NIGHT LUX POL RECT 120X280

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A039513</b> | 120X280   | 6,00           | PC BIA GL |



### DIMENSIONS AND SURFACE PROPERTIES


|   |              |                                  |
|---|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|---|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                           |                 |                         |
|---------------------------|-----------------|-------------------------|
| Water absorption capacity | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance        | EN ISO 10545-04 | => 40 N/mm <sup>2</sup> |
| Thermal shock resistance  | EN ISO 10545-09 | It stands the test      |
| Frost resistance          | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|  |                 |     |
|--|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GLA |
| Resistance to alcalis                                  | EN ISO 10545-13 | GLA |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

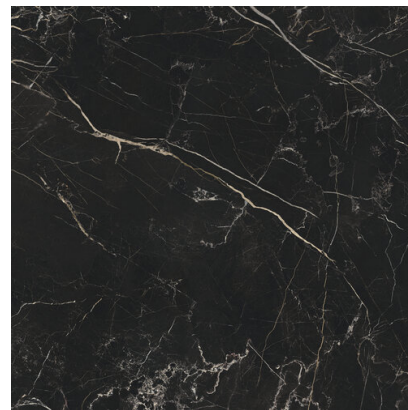

## NIGHT LUX MATT RECT 120X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A041790</b> | 120X120   | 9,60           | PC BIA GL |

### DIMENSIONS AND SURFACE PROPERTIES


### PHYSICAL PROPERTIES

|                  |                 |                    |
|------------------|-----------------|--------------------|
| Frost resistance | EN ISO 10545-12 | It stands the test |
|------------------|-----------------|--------------------|

### CHEMICAL PROPERTIES

## NIGHT LUX MATT RECT 60X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A036980</b> | 60x120    | 9,90           | PC BIA GL |

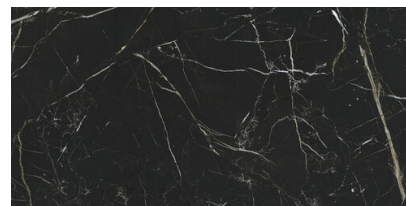

### DIMENSIONS AND SURFACE PROPERTIES

|   |              |                                  |
|---|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|---|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 45 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | III                     |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|  |                 |     |
|--|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GLA |
| Resistance to alcalis                                  | EN ISO 10545-13 | GLA |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |


### ANTI-SLIP CHARACTERISTICS

|                        |                |      |
|------------------------|----------------|------|
| Slip resistance (Rd)   | UNE-EN 16165-C | 0.00 |
| Slip resistance (DCOF) | ANSI A326.3    | 0.42 |



## NIGHT LUX POL RECT 60X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A038116</b> | 60x120    | 9,00           | PC BIA GL |

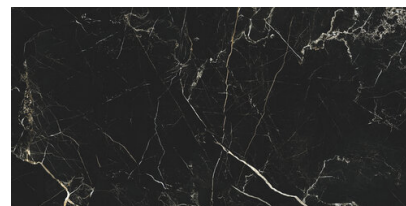

### DIMENSIONS AND SURFACE PROPERTIES

|   |              |                                  |
|---|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|---|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | II                      |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|  |                 |     |
|--|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GHB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GHB |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GHB |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

## MIRROR NIGHT LUX A POL RECT 60X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A038950</b> | 60x120    | 8,90           | PC BIA GL |



### DIMENSIONS AND SURFACE PROPERTIES

|   |              |                                  |
|---|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requirements |
|---|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | II                      |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|  |                 |     |
|--|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GHB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GHB |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GHB |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

## MIRROR NIGHT LUX B POL RECT 60X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A038951</b> | 60x120    | 8,90           | PC BIA GL |



### DIMENSIONS AND SURFACE PROPERTIES


|   |              |                                  |
|---|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requirements |
|---|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | II                      |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|  |                 |     |
|--|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GHB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GHB |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GHB |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

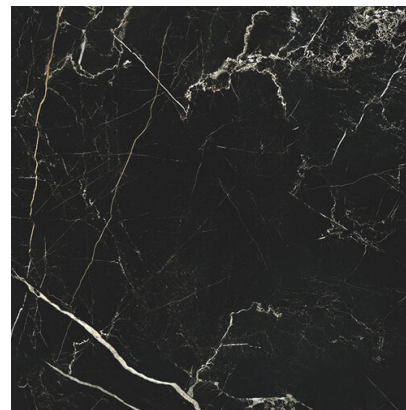

## NIGHT LUX MATT RECT 60X60

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A037202</b> | 60X60     | 9,60           | PC BIA GL |

### DIMENSIONS AND SURFACE PROPERTIES

|   |              |                                  |
|---|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|---|--------------|----------------------------------|

### PHYSICAL PROPERTIES


|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 45 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | III                     |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|  |                 |     |
|--|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GLA |
| Resistance to alcalis                                  | EN ISO 10545-13 | GLA |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

### ANTI-SLIP CHARACTERISTICS

|                        |                |      |
|------------------------|----------------|------|
| Slip resistance (Rd)   | UNE-EN 16165-C | 0.00 |
| Slip resistance (DCOF) | ANSI A326.3    | 0.42 |

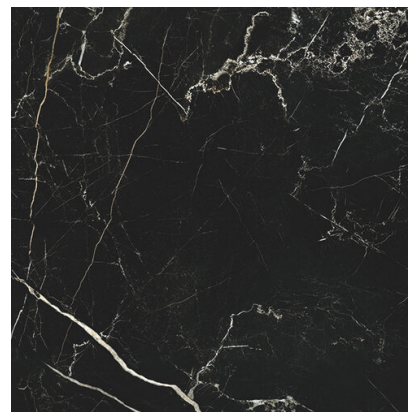

## NIGHT LUX POL RECT 60X60

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A040071</b> | 60X60     | 8,60           | PC BIA GL |

### DIMENSIONS AND SURFACE PROPERTIES

|   |              |                                  |
|---|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|---|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | II                      |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|  |                 |     |
|--|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GHB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GHB |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GHB |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

ROD. NIGHT LUX MATT 7,5X60

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP     |   |
|-----------|-----------|----------------|-----------|---|
| A038391   | 7,5x60    | 9,30           | PC BIA GL |  |

DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

|                  |                 |                    |
|------------------|-----------------|--------------------|
| Frost resistance | EN ISO 10545-12 | It stands the test |
|------------------|-----------------|--------------------|

CHEMICAL PROPERTIES

ROD. NIGHT LUX POL 7,5X60

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP     |
|-----------|-----------|----------------|-----------|
| A038390   | 7,5x60    | 10,20          | PC BIA GL |



DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

|                  |                 |                    |
|------------------|-----------------|--------------------|
| Frost resistance | EN ISO 10545-12 | It stands the test |
|------------------|-----------------|--------------------|

CHEMICAL PROPERTIES

## MANDALAY WHITE POL RECT 60X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A039185</b> | 60x120    | 10,20          | PC BIA GL |



### DIMENSIONS AND SURFACE PROPERTIES

|   |              |                                  |
|---|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requirements |
|---|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | IV                      |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |


### CHEMICAL PROPERTIES

|  |                 |     |
|--|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GLA |
| Resistance to alcalis                                  | EN ISO 10545-13 | GLA |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |



## NIGHT LUX MATT RECT 40X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP   |
|----------------|-----------|----------------|---------|
| <b>A038850</b> | 40X120    | 10,70          | REVESTI |

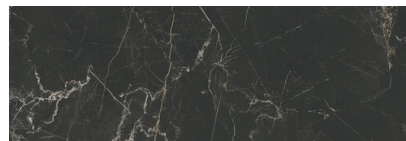

### DIMENSIONS AND SURFACE PROPERTIES

|   |              |                                  |
|---|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|---|--------------|----------------------------------|

### PHYSICAL PROPERTIES


|                           |                 |                        |
|---------------------------|-----------------|------------------------|
| Water absorption capacity | EN ISO 10545-03 | >10%                   |
| Flexion resistance        | EN ISO 10545-04 | =>12 N/mm <sup>2</sup> |
| Cracking resistance       | EN ISO 10545-11 | It stands the test     |
| Frost resistance          | EN ISO 10545-12 | Not pass the test      |

### CHEMICAL PROPERTIES

|  |                 |     |
|--|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GLB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GHB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 3   |

## OPERA NIGHT LUX MATT RECT 40X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP   |
|----------------|-----------|----------------|---------|
| <b>A038852</b> | 40X120    | 10,70          | REVESTI |



### DIMENSIONS AND SURFACE PROPERTIES

|   |              |                                  |
|---|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requirements |
|---|--------------|----------------------------------|

### PHYSICAL PROPERTIES


|                           |                 |                        |
|---------------------------|-----------------|------------------------|
| Water absorption capacity | EN ISO 10545-03 | >10%                   |
| Flexion resistance        | EN ISO 10545-04 | =>12 N/mm <sup>2</sup> |
| Cracking resistance       | EN ISO 10545-11 | It stands the test     |
| Frost resistance          | EN ISO 10545-12 | Not pass the test      |

### CHEMICAL PROPERTIES

|  |                 |     |
|--|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GLB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GHB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 3   |

## LUNA BLANCA MATT RECT 40X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP   |
|----------------|-----------|----------------|---------|
| <b>A038849</b> | 40X120    | 10,70          | REVESTI |



### DIMENSIONS AND SURFACE PROPERTIES

|   |              |                                  |
|---|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|---|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                           |                 |                        |
|---------------------------|-----------------|------------------------|
| Water absorption capacity | EN ISO 10545-03 | >10%                   |
| Flexion resistance        | EN ISO 10545-04 | =>12 N/mm <sup>2</sup> |
| Cracking resistance       | EN ISO 10545-11 | It stands the test     |
| Frost resistance          | EN ISO 10545-12 | Not pass the test      |


### CHEMICAL PROPERTIES

|  |                 |     |
|--|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GLB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GHB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 3   |

## ESSENCE LUNA BLANCA MATT

### RECT 40X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP   |
|----------------|-----------|----------------|---------|
| <b>A038851</b> | 40X120    | 11,00          | REVESTI |



#### DIMENSIONS AND SURFACE PROPERTIES

|   |              |                                  |
|---|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requirements |
|---|--------------|----------------------------------|

#### PHYSICAL PROPERTIES

|                           |                 |                        |
|---------------------------|-----------------|------------------------|
| Water absorption capacity | EN ISO 10545-03 | >10%                   |
| Flexion resistance        | EN ISO 10545-04 | =>12 N/mm <sup>2</sup> |
| Cracking resistance       | EN ISO 10545-11 | It stands the test     |
| Frost resistance          | EN ISO 10545-12 | Not pass the test      |

#### CHEMICAL PROPERTIES

|  |                 |     |
|--|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GLB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GHB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 3   |

## DECOR SET(2) LUNA BLANCA

### 40X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP   |
|----------------|-----------|----------------|---------|
| <b>A038853</b> | 40X120    | 11,40          | REVESTI |



#### DIMENSIONS AND SURFACE PROPERTIES


#### PHYSICAL PROPERTIES

|                  |                 |                   |
|------------------|-----------------|-------------------|
| Frost resistance | EN ISO 10545-12 | Not pass the test |
|------------------|-----------------|-------------------|

#### CHEMICAL PROPERTIES

## LAVABO NISO IZQ.

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A040865</b> |           | 0,00           | PC BIA GL |

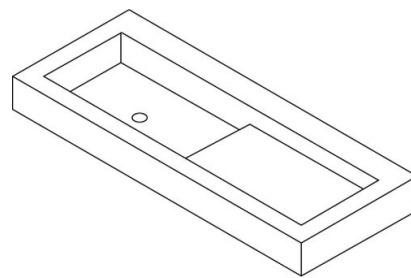

### DIMENSIONS AND SURFACE PROPERTIES


### PHYSICAL PROPERTIES

|                  |                 |                    |
|------------------|-----------------|--------------------|
| Frost resistance | EN ISO 10545-12 | It stands the test |
|------------------|-----------------|--------------------|

### CHEMICAL PROPERTIES

## LAVABO NISO DCHA.

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A040866</b> |           | 0,00           | PC BIA GL |

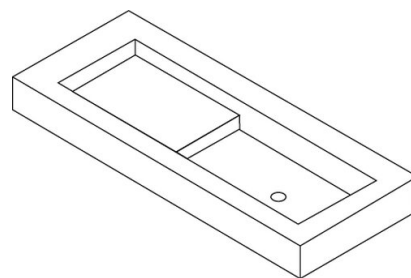

### DIMENSIONS AND SURFACE PROPERTIES


### PHYSICAL PROPERTIES

|                  |                 |                    |
|------------------|-----------------|--------------------|
| Frost resistance | EN ISO 10545-12 | It stands the test |
|------------------|-----------------|--------------------|

### CHEMICAL PROPERTIES

LAVABO DE PIE ROMA

|           |           |                |           |
|-----------|-----------|----------------|-----------|
| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP     |
| A040867   |           | 0,00           | PC BIA GL |

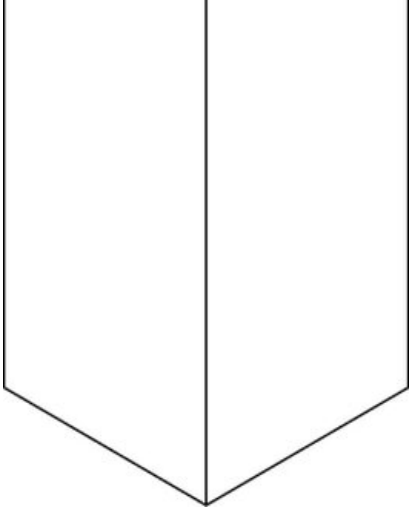

DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES


|                  |                 |                    |
|------------------|-----------------|--------------------|
| Frost resistance | EN ISO 10545-12 | It stands the test |
|------------------|-----------------|--------------------|

CHEMICAL PROPERTIES



LAVABO AXEL IZQ.

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP     |
|-----------|-----------|----------------|-----------|
| A040868   |           | 0,00           | PC BIA GL |

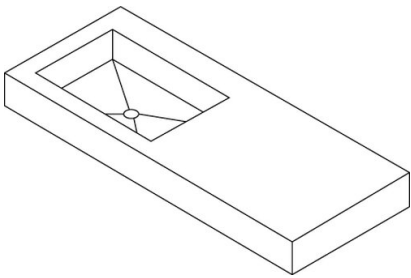

DIMENSIONS AND SURFACE PROPERTIES


PHYSICAL PROPERTIES

|                  |                 |                    |
|------------------|-----------------|--------------------|
| Frost resistance | EN ISO 10545-12 | It stands the test |
|------------------|-----------------|--------------------|

CHEMICAL PROPERTIES

LAVABO AXEL DCHA.

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP     |
|-----------|-----------|----------------|-----------|
| A040869   |           | 0,00           | PC BIA GL |

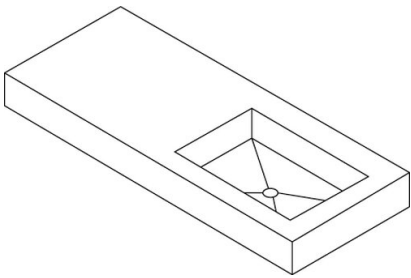

DIMENSIONS AND SURFACE PROPERTIES


PHYSICAL PROPERTIES

|                  |                 |                    |
|------------------|-----------------|--------------------|
| Frost resistance | EN ISO 10545-12 | It stands the test |
|------------------|-----------------|--------------------|

CHEMICAL PROPERTIES

## LAVABO AXEL CEN.

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A040870</b> |           | 0,00           | PC BIA GL |

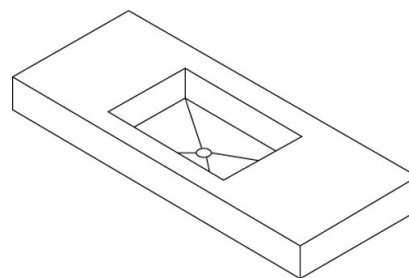

### DIMENSIONS AND SURFACE PROPERTIES


### PHYSICAL PROPERTIES

|                  |                 |                    |
|------------------|-----------------|--------------------|
| Frost resistance | EN ISO 10545-12 | It stands the test |
|------------------|-----------------|--------------------|

### CHEMICAL PROPERTIES

## LAVABO AXEL DOBLE 160

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A040871</b> |           | 0,00           | PC BIA GL |

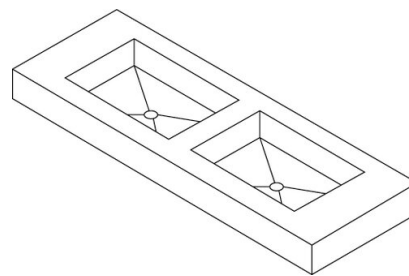

### DIMENSIONS AND SURFACE PROPERTIES


### PHYSICAL PROPERTIES

|                  |                 |                    |
|------------------|-----------------|--------------------|
| Frost resistance | EN ISO 10545-12 | It stands the test |
|------------------|-----------------|--------------------|

### CHEMICAL PROPERTIES

## LAVABO ENEA IZQ.

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A040872</b> |           | 0,00           | PC BIA GL |

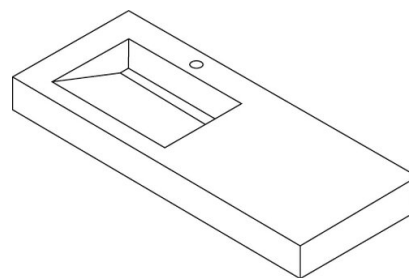

### DIMENSIONS AND SURFACE PROPERTIES


### PHYSICAL PROPERTIES

|                  |                 |                    |
|------------------|-----------------|--------------------|
| Frost resistance | EN ISO 10545-12 | It stands the test |
|------------------|-----------------|--------------------|

### CHEMICAL PROPERTIES

## LAVABO ENEA DCHA.

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A040873</b> |           | 0,00           | PC BIA GL |

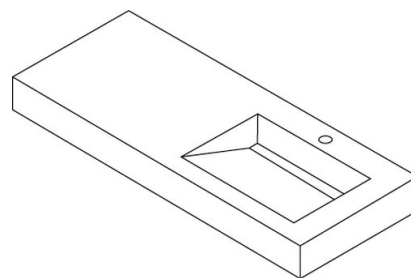

### DIMENSIONS AND SURFACE PROPERTIES


### PHYSICAL PROPERTIES

|                  |                 |                    |
|------------------|-----------------|--------------------|
| Frost resistance | EN ISO 10545-12 | It stands the test |
|------------------|-----------------|--------------------|

### CHEMICAL PROPERTIES

LAVABO ENEA CEN.

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP     |
|-----------|-----------|----------------|-----------|
| A040874   |           | 0,00           | PC BIA GL |

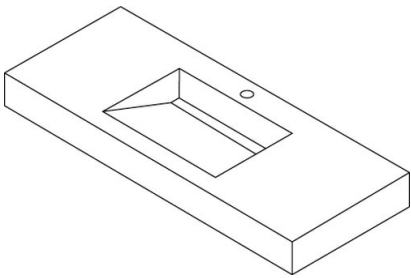

DIMENSIONS AND SURFACE PROPERTIES


PHYSICAL PROPERTIES

|                  |                 |                    |
|------------------|-----------------|--------------------|
| Frost resistance | EN ISO 10545-12 | It stands the test |
|------------------|-----------------|--------------------|

CHEMICAL PROPERTIES

## LAVABO ENEA DOBLE 160

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A040875</b> |           | 0,00           | PC BIA GL |

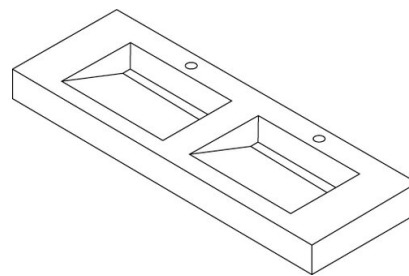

### DIMENSIONS AND SURFACE PROPERTIES

### PHYSICAL PROPERTIES

|                  |                 |                    |
|------------------|-----------------|--------------------|
| Frost resistance | EN ISO 10545-12 | It stands the test |
|------------------|-----------------|--------------------|

### CHEMICAL PROPERTIES